

STANDARD FEATURES:

WASHDOWN DUTY, STAINLESS STEEL, ELECTRIC MOTOR, THREE PHASE 220/440/60, 1750 RPM NOMINAL STAINLESS STEEL TRICLAMP PEDESTAL WITH ACCESS WINDOW 316SS WETTED PARTS - MILL/CAST FINISH 3/4" MIXER SHAFT - LENGTH TO FIT (UP TO 72" MAX) SINGLE OR DUAL MARINE IMPELLERS WITH SET SCREW OR WELDED ATTACHMENT

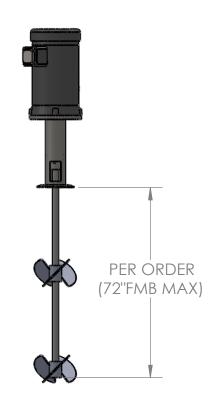

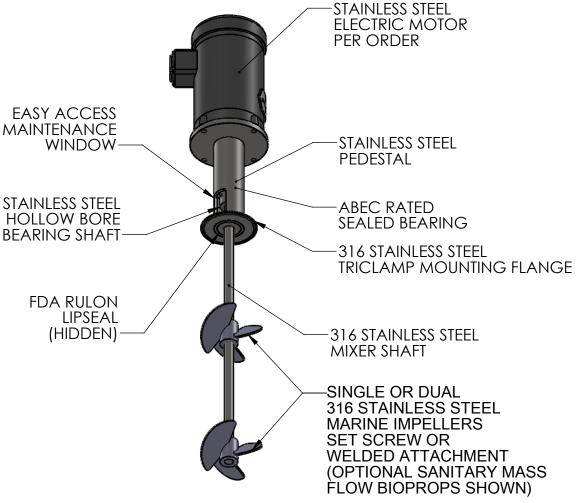

OPTIONS:
SINGLE PHASE TEFC MOTOR
EXLOSION PROOF MOTOR
AIR MOTOR
VITON OR EPDM LIPSEAL
MECHANICAL SEAL (MODEL# PHD-FM)
SANITARY FINISHING OPTIONS
ALTERNATE IMPELLER SIZES AND TYPES
(SANITARY BIOPROP RECOMMENDED)

| | ı |
|----------------------------|---|
| UNLESS OTHERWISE SPECIFIED | r |
| | ı |
| DIMENSIONS ARE IN INCHES | H |
| REMOVE BURRS AND BREAK | ı |
| SHARP EDGES .005015 | ŀ |
| WELDS TO BE CONTINUOUS AND | ı |
| FREE OF VOIDS & CRACKS | Ľ |
| FRACTION ± 1/16 | Γ |
| 0 PLACES ± 1/8 | ı |
| | |

| TE OF ADIDO | & CRACKS |
|-------------|----------|
| FRACTION | ± 1/16 |
| 0 PLACES | ± 1/8 |
| 1 PLACE | ± .06 |
| 2 PLACE | ± .010 |
| 3 PLACE | ± .005 |
| ANGLE | + 2* |

| SIGNATURE & DATE | | | |
|------------------|----------------|--|--|
| DRAWN | PIC | | |
| CHKR | TS | | |
| JOB NO. | N/A | | |
| MATERIAL | : AS REQ'D | | |
| TREATMEN | ıт: N/A | | |
| SCALE | N/A | | |



| | <u> </u> | \sim | | | |
|--------------|----------|--------|---------------|-----------------|--|
| DWG PHD-FL | - PURE | HD D | IRECT DRIVE M | IXER - ELECTRIC | |
| SHEET 1 OF 1 | SIZE | DWG. | 000000 | R - | |