
STANDARD FEATURES:


- PAINTED, THREE PHASE, TEFC, 208-230/460/60 ELECTRIC MOTOR (PER ORDER)
- HELICAL GEARBOX 5:1 REDUCTION RATIO 350 RPM NOMINAL OUTPUT
- ADJUSTABLE BRIDGE MOUNT
- 316SS WETTED PARTS
- 1" X 36" FMB SHAFT STANDARD
- SINGLE OR DUAL FOLDING IMPELLERS WITH SET SCREW ATTACHMENT
- ANALOG SPEED CONTROL (VFD)



OPTIONAL FEATURES:

- SINGLE PHASE INPUT
- ALL STAINLESS STEEL UPGRADE WITH STAINLESS MOTOR, MOUNT & FASTENERS
- FORKLIFT CHANNELS
- SANITARY FINISHES
- FLOATING TOTE CAP WITH LIP SEAL
- DIGITAL SPEED CONTROL (VFD)

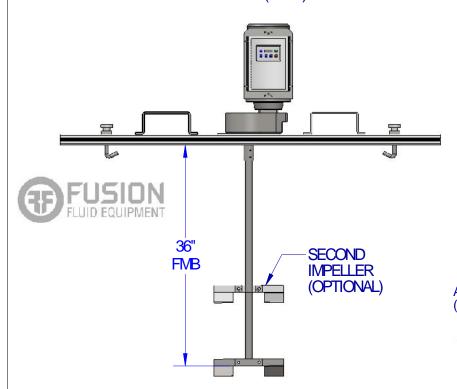

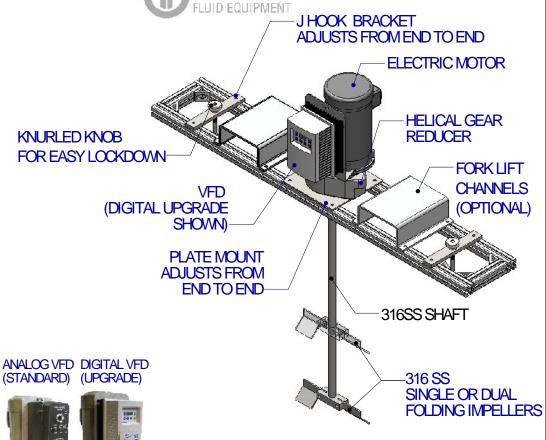

BRIDGE MOUNT TOTE MIXERS MOUNT TO **CAGE STYLE TOTES UP TO 52" WIDE**

EST WT: 84-170 LBS (DEPENDING ON HP AND OPTIONS)

CHECKED	PIC	
PROPRIETARY AND CONFIDENTIA		
THE INFORMATION CONTAINED IN THIS		
DRAWING IS THE SOLE PROPERTY OF FUSION FLUID EQUIPMENT LLC. ANY REPRODUCTION IN		
PART OR AS A WHOLE WITHOUT THE WRITTEN		

NAME DATE
DRAWN JM 6/8/15

PERMISSION OF FUSION FLUID EQUIPMENT LLC IS

UNLESS OTHERWISE SPECIFIED: DO NOT SCALE DRAWING NOTIFICATION OF THE DESIGNATION OF CONTRACTION OF CONTRACT OF THE DESIGNATION OF CONTRACT OF THE DESIGNATION OF THE DESIGNATI



SPEED TABLE

BRIDGE MOUNT TOTE MIXER GEAR DRIVE ELECTRIC WITH VFD

SIZE DWG. NO. REV SALES-BG-#T-#-V# Α SCALE: 1:16 WEIGHT: SHEET 1 OF 1

DIMENSIONS ARE IN INCHES.