
STANDARD FEATURES:

PAINTED AIR MOTOR WITH MUFFLER TOTE CAP MOUNT WITH TIE ROD KIT 316SS WETTED PARTS 3/4" X 36" FMB SHAFT STANDARD SINGLE OR DUAL MARINE IMPELLERS WITH SET SCREW ATTACHMENT SPEED CONTROL



OPTIONAL FEATURES:
PNEUMATIC CONTROLS
FILTER/REGULATOR/LUBRICATOR (FRL)
ALTERNATE IMPELLER SIZES AND TYPES
ALL STAINLESS STEEL UPGRADE WITH STAINLESS MOTOR,
STAINLESS MOUNT & STAINLESS FASTENERS
SANITARY FINISHES

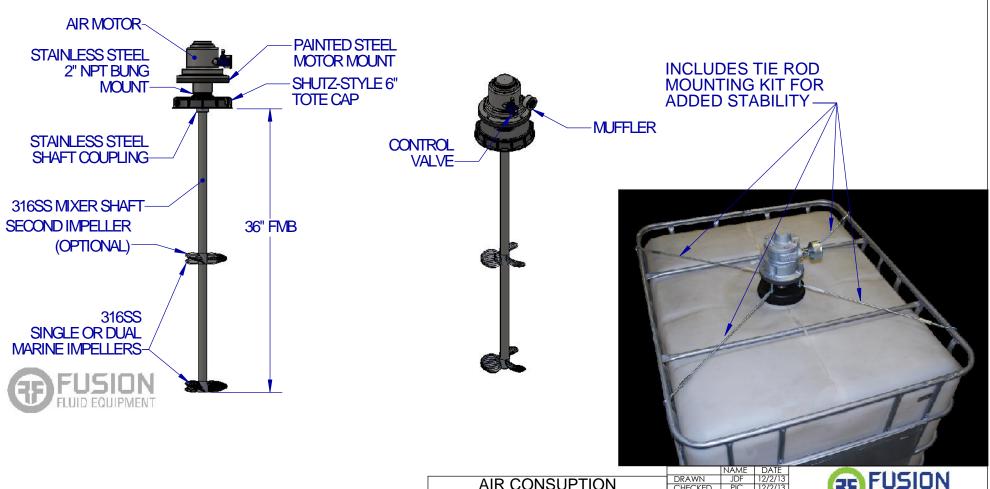

			INAME	DAIL		ALC: NO.	
AID CONCLIDITION		DRAWN	JDF	12/2/13			<u> </u>
AIR CONSUPTION		CHECKED	PIC	12/2/13			
1 HP	40 CFM @ 80 PSI	PROPRIETARY A	AND CON	FIDENTIAL	L		FL
LIIF	40 CI W @ 00 F 31	THE INFORMATION C			TITLE:		
2 HP		FLUID EQUIPMENT LLO	C. ANY REPRO	DUCTION IN		TOT	E CA
2111	00 OI W @ 70 I OI	PART OR AS A WHOLE PERMISSION OF FUSION					
3 HP	90 CFM @ 100 PSI	PROHIBITED.	JITTEOID EQU		101	E MIX	ER-L
5111	30 OI W @ 100 I OI	WHILE FUSION FUSIO	N FLUID EQUIP	MENT LLC			
LINITES OTHERWISE SPECIFIED.					CI7E	DWC	NIO

EST WT: 25-41 LBS (DEPENDING ON HP AND OPTIONS)

WHILE FUSION FUSION FULID FOURMENT LC

WHILE FUSION FUSION FULID FOURMENT LC

WHILE FUSION FUSION FULID FOURMENT LC

BOWLINGS OF MAINTAIN FUR INTERCRIPT OF A

BOWLINGS AS APPROVED, FUSION FULID FULID

BOWLINGS AS APPROVED, FUSION FULID

BOWLINGS TO MAINTAIN FUR FULID

FUNCTION OF THE DESIGN WITHOUT CUSTOMER

MOTIFICATION OR CONSENT.

TOTE CAP MOUNTED
TOTE MIXER-DIRECT DRIVE AIR
SIZE DWG, NO. REV

SCALE: 1:12 WEIGHT: SHEET 1 OF 1