




1.) REMOVE THE GEARBOX'S SHAFT COVER BY REMOVING THE BOLTS THAT HOLD IT DOWN. KEEP THE SHAFT COVER AND BOLTS.

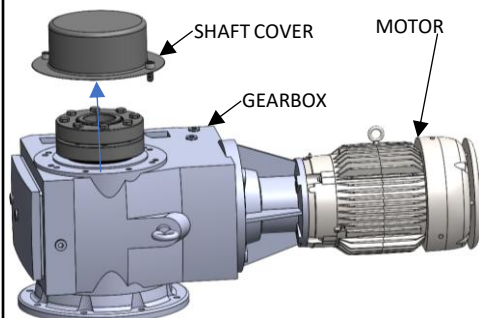


3.) VERIFY ALL THE BOLTS ON THE SHRINK DISC ARE LOOSE AND SLIDE THE SHRINK DISC ONTO THE HOLLOW BORE OD.

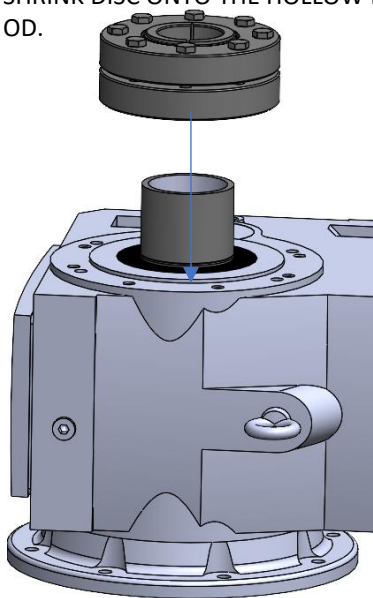


5.) POSITION THE SHAFT SO IT'S FLUSH WITH THE HOLLOW BORE OR AS INDICATED ON THE APPROVAL (OR AS MANUFACTURED) DRAWING.

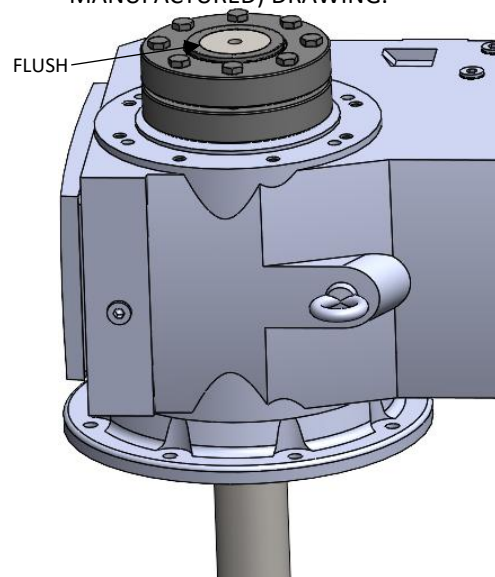

2.) DEBURR & CLEAN SHAFT AND HOLLOW BORE ID WITH ACETONE OR A SIMILAR SOLVENT. INSERT THE SHAFT INTO THE GEARBOX'S HOLLOW BORE.

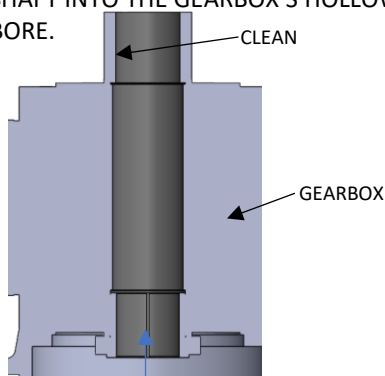

4.) IT'S IMPORTANT TO NOTE THAT IN SOME CASES THE GEARBOX HOLLOW BORE, TORQUE SIDE BUSHING, SHRINK DISK, AND SHAFT WILL BE MARKED WITH HAMMER PEENS AND PAINT PEN MARKS 90° APART. IF PRESENT, ENSURE THAT ALL OF THESE MARKS LINE UP.

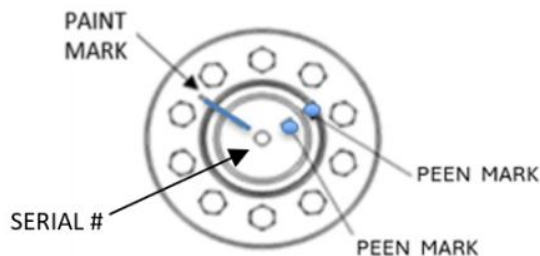


CAUTION


DISCONNECT MIXER FROM POWER SOURCE BEFORE ASSEMBLING, LIFTING, MOVING, OR SERVICING MIXER.



SHAFT INSTALLATION – SHRINK DISCS (CONTINUED)

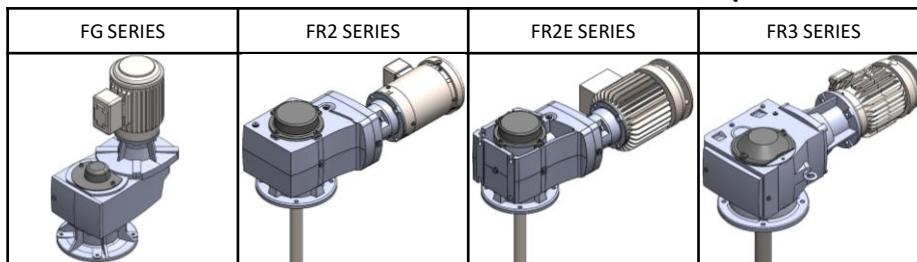

6.) VERIFY THERE IS CLEARANCE BETWEEN THE GEARBOX AND THE SHRINK DISC. HAND TIGHTEN 3 OR 4 EQUALLY SPACED BOLTS. THEN HAND TIGHTEN THE REMAINING BOLTS.

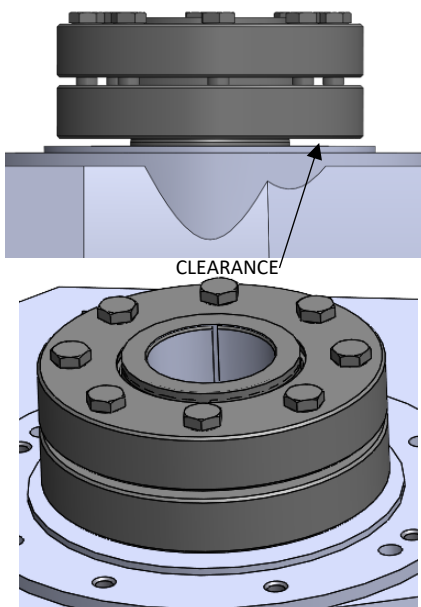

CAUTION: TIGHTENING SHRINK DISC WITHOUT SHAFT IN THE BORE, WILL CAUSE DAMAGE TO THE GEARBOX.




CAUTION

DISCONNECT MIXER FROM POWER SOURCE BEFORE ASSEMBLING, LIFTING, MOVING, OR SERVICING MIXER.

7.) TIGHTEN THE BOLTS IN A CIRCULAR PATTERN USING 1/4 (90°) TURNS, EVEN IF SOME BOLTS INITIALLY REQUIRE VERY LOW TIGHTENING TORQUE TO ACHIEVE 1/4 TURNS. TIGHTEN TO THE APPROPRIATE “TIGHTENING TORQUE” VALUE IN THE TABLE.

Screw Size	Wrench Size	Tightening Torque	4% Over Torque
M5	8	62 in-lb.	64 in-lb.
M6	10	106 in-lb.	110 in-lb.
M8	13	22 ft-lb.	23 ft-lb.
M10	17	44 ft-lb.	46 ft-lb.
M12	19	74 ft-lb.	77 ft-lb.
M16	24	184 ft-lb.	191 ft-lb.
M20	30	361 ft-lb.	375 ft-lb.
M24	36	620 ft-lb.	645 ft-lb.
M30	46	1254 ft-lb.	1304 ft-lb.

BOLT TIGHTENING PATTERN

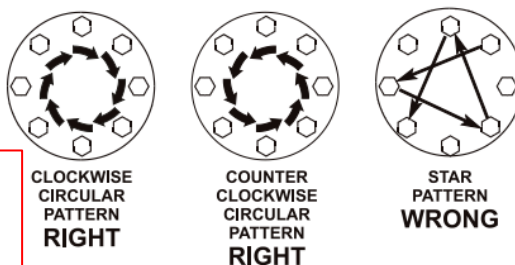

8.) CONTINUE THE TIGHTENING SEQUENCE DESCRIBED IN THE PREVIOUS STEP. WHEN THE TORQUE ON THE BOLT IS AT THE “TIGHTENING TORQUE” VALUE WITH LESS THAN 1/4 TURN ON THE BOLT, PROCEED TO THE NEXT STEP.



9.) SET THE TORQUE WRENCH TO THE APPROPRIATE “4% OVER TORQUE” VALUE IN THE TABLE. DO ONE OR TWO COMPLETE ROTATIONS USING THE SAME CIRCULAR PATTERN TECHNIQUE.

10.) RESET THE TORQUE WRENCH TO THE APPROPRIATE “TIGHTENING TORQUE” VALUE IN THE TABLE. ENSURE ALL OF THE BOLTS ARE PROPERLY TIGHTENED USING THE CIRCULAR PATTERN.

11.) INSTALL THE SHAFT COVER AND BOLTS BACK ONTO THE GEARBOX.

